



MAXI P LINE

Corpo illuminante led a binario. Nato per rispondere alle esigenze per l'illuminazione delle aree commerciali, aree vendite, gallerie commerciali, aree comuni. Compatto e facile da montare, flessibile e orientabile.

Led track fixture. Created to meet the lighting requirements of commercial areas, sales areas, commercial galleries, common areas. It is compact and easy to assemble, flexible and adjustable.



Colore
Colour

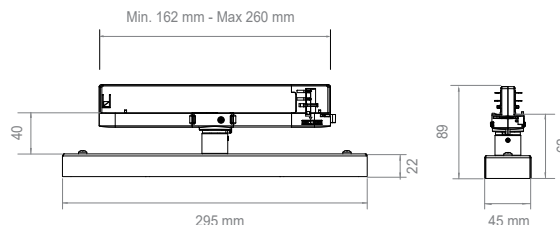

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

CORPO / BODY

In lamiera di acciaio
Sheet steel

RAFFREDDAMENTO / COOLING

Dissipazione passiva
Passive heat dissipation

POTENZA / POWER

12 W Led - 14,5 W Sistema / System - XE Version
16 W Led - 19 W Sistema / System - HF Version

I dati inerenti ai wattaggi sono puramente indicativi e soggetti ad aggiornamento
The data relating to wattages is provided as a guideline and is subject to change

SISTEMA OTTICO / OPTICAL SYSTEM

Lenti in PMMA
PMMA lens

DURATA / LIFE TIME (TA = 25°C)

Mantenimento lumen: L80B50 ≥ 100.000 h - L80B10 ≥ 60.000
Lumen maintenance: L80B50 ≥ 100.000 h - L80B10 ≥ 60.000

RESA CROMATICA / COLOUR RENDERING

CRI > 80 (3000 K - 4000 K)

CODICE CODE	LENTI LENS	DATI TECNICI LED LED TECHNICAL DATA	COLORE COLOUR	ACCESSORI ACCESSORIES
BML	30 30°	XE0W 12 W 2000 lm 3000 K	B BIANCO / WHITE	0
	60 60°	XE0C 12 W 2100 lm 4000 K	N NERO / BLACK	
	90 90°	HF0W 16 W 2600 lm 3000 K	G GRIGIO / GREY	
	AS Asymmetrical	HF0C 16 W 2750 lm 4000 K		
	BW Batwing			

Esempio di costruzione codice / Coding example

BML30XE0WB0

BML CODICE CODE + 30 LENTI LENS + XE0W DATI TECNICI LED LED TECHNICAL DATA + B COLORE COLOUR + 0 ACCESSORI ACCESSORIES

DISPONIBILE SU RICHIESTA / AVAILABLE ON REQUEST

